

HellermannTyton



## CPK goes hybrid

Corded performance combined  
with cordless convenience

**MADE FOR REAL** 

# HellermannTyton



## World's first fully automated, cordless cable tie application tool

You have the choice: cordless operation with rechargeable battery pack, corded with AC power, or a combination of both.



*Operated by power supply*



*Operated by battery with cable ties on a reel from overhead suspension*



*Operated by battery with cable tie bandolier*

### Fully flexible, fast and reliable cable tying

- The CPK Hybrid offers unprecedented flexibility, portability and freedom of movement when working in multiple locations or in tight spaces.
- Alternatively, use the CPK Hybrid as a corded tool by plugging into AC power.
- Rapidly applies 18 lb ties to bundles up to 0.8" diameter.
- Batteries have a quick charging time, and up to 8,000 ties can be applied with a fully charged battery.

### Automated, high quality cable tie application

- Process-reliable, consistent bundling, tensioning and cutting.
- HT Data Management CPK software (included) for extensive data evaluation and monitoring of the tensioning process.
- Export function for manufacturing data and further service functions.
- Consistent documentation for every bundling process.



### CPK Hybrid Tool

<b>POWER SUPPLY</b>	120VAC or 18V battery
<b>Cycle Time</b>	0.65-1.0 sec. depending on quality and force
<b>Weight</b>	3.44 lb
<b>Tension Setting</b>	Adjustable



PART NO.	TYPE	Color	Pkg. Qty.
106-60000	Autotool CPK hybrid	Dark Blue	1

Dimensions are approximate and subject to technical changes. Use Part No. for ordering and Type for specification purposes.



### Power Supply Options

PART NO.	Description	Color	Pkg. Qty.
104-10103	CAS battery	Black	1
104-10133	CAS battery with charger	Silver	1
106-00100	CPK Hybrid power pack	Gray	1

Dimensions are approximate and subject to technical changes. Use Part No. for ordering and Type for specification purposes.

### Cable Ties for CPK Hybrid

MATERIAL	Polyamide 6.6 V0 (PA66V0)	Polyamide 6.6 heat stabilized (PA66HS)	Polyamide 6.6 (PA66)	Polyamide 4.6 (PA46)
<b>Operating Temperature</b>	-40°F to +221°F (-40°C to +105°C)	-40°F to +257°F (-40°C to +125°C)	-40°F to +185°F (-40°C to +85°C)	-40°F to +275°F (-40°C to +135°C)
<b>Color</b>	White (WH)	Black (BK)	Natural (NA)	




PART NO.	TYPE	Min. Tensile Strength lbs. (N)	Length (L) in. (mm)	Max. Bundle Diameter in. (mm)	Width (W) in. (mm)	Color	Pkg. Qty.
T18RA50HSW*	T18RA50	18.0 (80.0)	4.0 (4.8)	0.8 (20.0)	0.1 (2.5)	Black	500
T18RA5000HSW*	T18RA5000	18.0 (80.0)	4.0 (4.8)	0.8 (20.0)	0.1 (2.5)	Black	5000
T18RA50*	T18RA50	18.0 (80.0)	4.0 (4.8)	0.8 (20.0)	0.1 (2.5)	Natural	500
T18RA5000*	T18RA5000	18.0 (80.0)	4.0 (4.8)	0.8 (20.0)	0.1 (2.5)	Natural	5000
T18RA50VO*	T18RA50	18.0 (80.0)	4.0 (4.8)	0.8 (20.0)	0.1 (2.5)	White	500
120-05015	T18RA5000	18.0 (80.0)	4.0 (4.8)	0.8 (20.0)	0.1 (2.5)	Natural	5000

Dimensions are approximate and subject to technical changes. Use Part No. for ordering and Type for specification purposes.  
 \*This product meets UL standards. Please go to hellermannnyton.us for specific file numbers.

### CPK Hybrid Accessories

PART NO.	TYPE	Description	Color	Pkg. Qty.
106-00040	Bench mount kit CPK	AT2000 CPK Bench Mount Kit	Metal	1
106-00050	Overhead suspension CPK	AT2000 CPK Overhead Suspension	Metal	1
106-00071	SP CPK hanger premium cpl.	AT2000 CPK Hanger	Silver	1
HH-20	HH20	Screw Mount Wire Retainer	Natural	25

Dimensions are approximate and subject to technical changes. Use Part No. for ordering and Type for specification purposes.

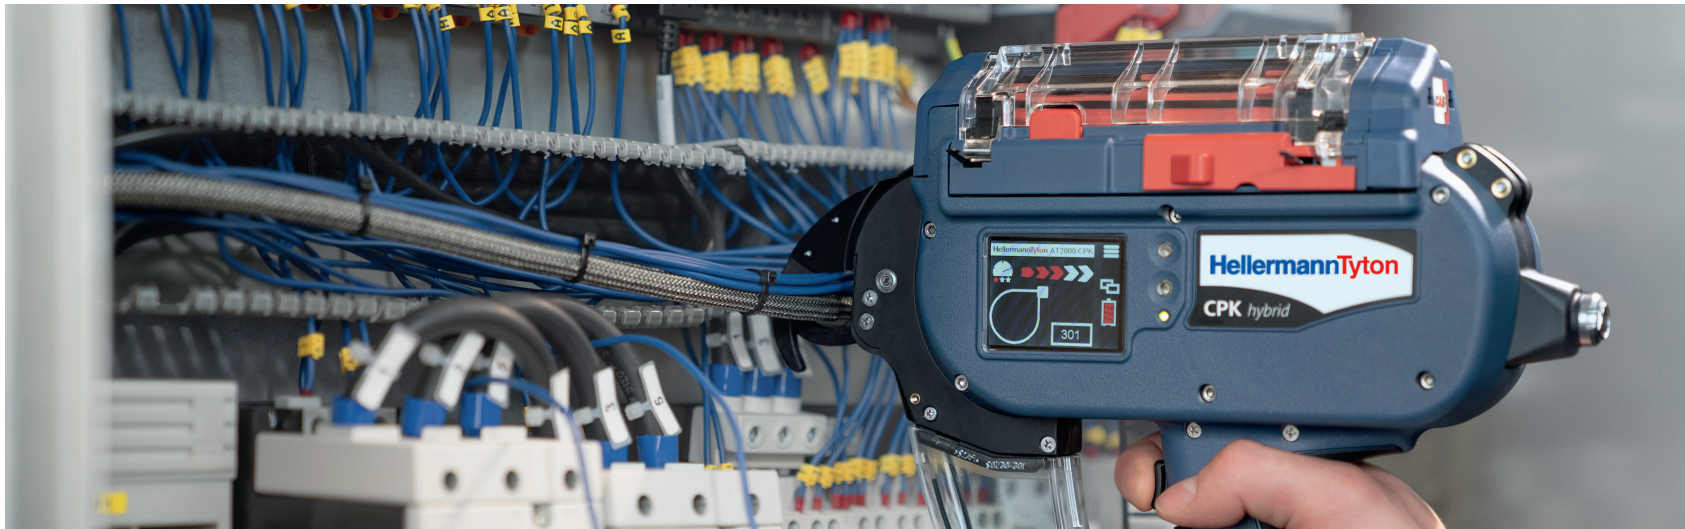

### High-quality application process

- 5 tension and 3 quality settings.
- Can be integrated into fully automated production lines.
- Evaluate the data as well as monitor the application process with HT Data Management CPK Software.



### Optimized design

- With a modified handle, the new CPK hybrid is now able to stand upright so you can conveniently stand it on the workbench with battery pack or without.



### 20% faster binding

- The CPK Hybrid applies and cuts 92 ties per minute – 20% faster than the previous model.



### Tool case

- The CPK Hybrid is delivered in a robust, portable case.
- It offers space for the tool, three batteries, a charger and a power supply, depending on what's required for your application.



### Long-lasting batteries

- The new CPK Hybrid can be operated with an 18V Metabo CAS battery – a universal battery that fits many professional tools from different brands.
- The charge level can be read on the tool display and on the battery.
- The fast-charging battery applies up to 8,000 ties per battery charge.

## HellermannTyton North American Corporate Headquarters

7930 N. Faulkner Rd, PO Box 245017  
Milwaukee, WI 53224-9517  
Phone: (414) 355-1130, (800) 537-1512  
Fax: (414) 355-7341, (800) 848-9866  
email: corp@htamericas.com  
www.hellermann.tyton.com

**IATF 16949, AS9100, ISO 9001 and ISO 14001 certified**

**Warranty Policy** – HellermannTyton products are warranted to be free from defects in material and workmanship at the time sold by us; but our obligation under this warranty and that of the seller is limited to the replacement of the product, and neither we nor the seller are bound by any other warranty, expressed, implied or statutory. Under no circumstances are we or the seller liable for any loss, damage, expenses or consequential damages of any kind arising out of the use or inability to use these products. All are sold with the understanding that the user will test them in actual use and determine their adaptability for the intended uses.

© HellermannTyton Corporation

## HellermannTyton Canada

Unit #4, 205 Industrial Parkway North  
Aurora, Ontario L4G 4C4 Canada  
Phone: (800) 661-2461  
Fax: (800) 390-3904  
email: sales@hellermanntyton.ca

## HellermannTyton Mexico

Anillo Periferico Sur 7980 Edificio 6A  
Parque Industrial Tecnologico II  
Santa Maria Tequepexpan  
Tlaquepaque, Jalisco, Mexico 45601  
Phone: 011-52-33-3-133-9880  
Fax: 011-52-33-3-133-9861  
email: info@htamericas.com.mx

**ISO 9001 certified**