

“Stay Connected” with



Solar Power Components

a PennEngineering® Company




## Heyco® SunStrap

PVC Coated Stainless Steel Strap

PART SPECIFICATIONS				PART NO.	DESCRIPTION	PART DIMENSIONS			
Max. Tensile Strength		Max. Bundle Diameter				A Length		B Diameter	
Lbs.	N	in.	mm.			in.	mm.	in.	mm.
200	890	2.0	50,8	<b>S6608</b>	SunStrap 8	8	203,0	.25	6,4
		3.0	76,2	<b>S6612</b>	SunStrap 12	12	304,8		

- Heavy Duty construction for harsh environments.
- 200 pounds pull force.
- Releasable and reusable.
- Tensile Strength shown is based on Max Bundle Diameter.
- Larger bundle diameters possible; will affect tensile strength

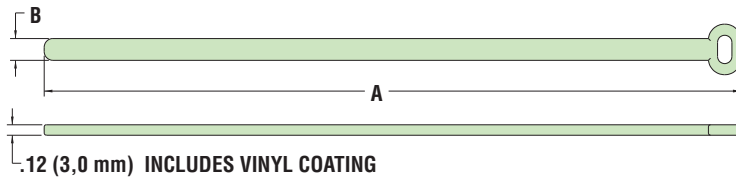

Material PVC Coated stainless steel  
 Temperature Range -40°F (40°C) to 194°F (90°C)

*Quick  
Specs*