



## Heyco® Stainless Steel Cable Ties


Ball Lock Stainless Steel Strip Cable Ties - Standard and PVC Coated

PART SPECIFICATIONS				PART NO.		DESCRIPTION	PART DIMENSIONS			
Min. Tensile Strength		Max. Bundle Diameter		Standard Steel	PVC Coated Black		A Length		B Width	
Lbs.	N	in.	mm.			in.	mm.	in.	mm.	
<b>AISI 304</b>										
112	500	1.18	30,0	<b>12801</b>	<b>12801B</b>	NTSS-0150-46A	5.91	150,0	.18	4,6
		2.05	52,0	<b>12802</b>	<b>12802B</b>	NTSS-0200-46A	7.87	200,0		
		2.68	68,0	<b>12803</b>	<b>12803B</b>	NTSS-0250-46A	9.84	250,0		
		3.23	82,0	<b>12805</b>	<b>12805B</b>	NTSS-0300-46A	11.81	300,0		
		3.86	98,0	<b>12806</b>	<b>12806B</b>	NTSS-0350-46A	13.78	350,0		
		4.33	110,0	<b>12808</b>	<b>12808B</b>	NTSS-0400-46A	15.75	400,0		
		5.75	146,0	<b>12810</b>	<b>12810B</b>	NTSS-0500-46A	19.69	500,0		
		7.09	180,0	<b>12812</b>	<b>12812B</b>	NTSS-0600-46A	23.62	600,0		
		9.50	240,0	<b>12814</b>	<b>12814B</b>	NTSS-0800-46A	31.50	800,0		
250	1115	2.05	52,0	<b>12821</b>	<b>12821B</b>	NTSS-0200-79A	7.87	200,0	.31	7,9
		2.68	68,0	<b>12822</b>	<b>12822B</b>	NTSS-0250-79A	9.84	250,0		
		3.23	82,0	<b>12824</b>	<b>12824B</b>	NTSS-0300-79A	11.81	300,0		
		3.86	98,0	<b>12825</b>	<b>12825B</b>	NTSS-0350-79A	13.78	350,0		
		4.33	110,0	<b>12827</b>	<b>12827B</b>	NTSS-0400-79A	15.75	400,0		
		5.75	146,0	<b>12829</b>	<b>12829B</b>	NTSS-0500-79A	19.69	500,0		
		7.09	180,0	<b>12831</b>	<b>12831B</b>	NTSS-0600-79A	23.62	600,0		
		8.27	210,0	<b>12833</b>	<b>12833B</b>	NTSS-0700-79A	27.56	700,0		
		9.50	240,0	<b>12834</b>	<b>12834B</b>	NTSS-0800-79A	31.50	800,0		
		12.09	307,0	<b>12836</b>	<b>12836B</b>	NTSS-1000-79A	39.37	1000,0		
		<b>AISI 316</b>								
112	500	1.18	30,0	<b>12851</b>	<b>12851B</b>	NTSS-0150-46B	5.91	150,0	.18	4,6
		2.05	52,0	<b>12852</b>	<b>12852B</b>	NTSS-0200-46B	7.87	200,0		
		2.68	68,0	<b>12853</b>	<b>12853B</b>	NTSS-0250-46B	9.84	250,0		
		3.23	82,0	<b>12855</b>	<b>12855B</b>	NTSS-0300-46B	11.81	300,0		
		3.86	98,0	<b>12856</b>	<b>12856B</b>	NTSS-0350-46B	13.78	350,0		
		4.33	110,0	<b>12858</b>	<b>12858B</b>	NTSS-0400-46B	15.75	400,0		
		5.75	146,0	<b>12860</b>	<b>12860B</b>	NTSS-0500-46B	19.69	500,0		
		7.09	180,0	<b>12862</b>	<b>12862B</b>	NTSS-0600-46B	23.62	600,0		
		9.50	240,0	<b>12864</b>	<b>12864B</b>	NTSS-0800-46B	31.50	800,0		
250	1115	2.05	52,0	<b>12871</b>	<b>12871B</b>	NTSS-0200-79B	7.87	200,0	.31	7,9
		2.68	68,0	<b>12872</b>	<b>12872B</b>	NTSS-0250-79B	9.84	250,0		
		3.23	82,0	<b>12874</b>	<b>12874B</b>	NTSS-0300-79B	11.81	300,0		
		3.86	98,0	<b>12875</b>	<b>12875B</b>	NTSS-0350-79B	13.78	350,0		
		4.33	110,0	<b>12877</b>	<b>12877B</b>	NTSS-0400-79B	15.75	400,0		
		5.75	146,0	<b>12879</b>	<b>12879B</b>	NTSS-0500-79B	19.69	500,0		
		7.09	180,0	<b>12881</b>	<b>12881B</b>	NTSS-0600-79B	23.62	600,0		
		8.27	210,0	<b>12883</b>	<b>12883B</b>	NTSS-0700-79B	27.56	700,0		
		9.50	240,0	<b>12884</b>	<b>12884B</b>	NTSS-0800-79B	31.50	800,0		
		12.09	307,0	<b>12886</b>	<b>12886B</b>	NTSS-1000-79B	39.37	1000,0		

**NEW PRODUCT**



- For ease of assembly, position locking head so that the widest end is down.
- Part Description Key: NTSS-XXXX-YYA where XXXX = length (mm) and YYA = width (mm) with A indicating AISI 304 stainless steel and B indicating AISI 316 stainless steel.
- Stainless steel cable ties have more strength and better durability than nylon cable ties.
- Locking ball design for maximum holding strength and ease of installation.
- Coated ties offer additional protection and separation of dissimilar metals for improved corrosion resistance.
- Suitable for harsh outdoor environments; conform to standard IEC92 for Marine Electrical Appliances and the requirements of CB1113-85 “Plastic Covered Metal Cable Ties”, “Steel Sea Boats Construction Level Standard.”
- Secure bundles in moist and high temperature environments with decay, fire, corrosion, and radio resistance.
- Widely used in shipping, communication, and flight applications.
- .010" (0,25 mm) thick.
- Custom lengths available.
- 100 pack standard.

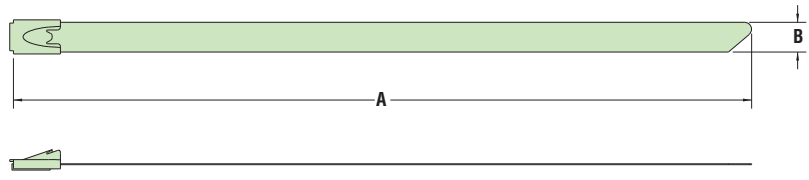

Materials AISI 304 or 316 stainless steel with PVC coating

*Quick Specs*