



NO O-RING  
REQUIRED!

ALL NEW  
PRODUCTS!


**Heyco® -Tite Liquid Tight Cordgrips**  
**Split Gland for Pre-assembled Cables with Integral Sealing Ring**  
*The Ultimate in Liquid Tight Strain Relief Protection*



CABLE DIAMETER RANGE				PART NUMBER		DESCRIPTION	UL or RV	PART DIMENSIONS											
Minimum		Maximum		Black	Gray			A	B	C		D		E		F			
in.	mm.	in.	mm.			Clearance Hole Dia.	Max. O.A. Length	Thread Length	Thickness	Wrenching Nut		Flat Size		Sealing Nut Inside Dia.					
						in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.				
<b>NPT Hubs</b>																			
.210	5,3	.334	8,5	M3200GBH	M3201GBH	LTCG LL 1/2 NPT 8.5 MM Split	cRV <sub>us</sub>	.875	22,2	1.68	42,7	.44	11,2	.25	6,4	1.06	27,0	.56	14,2
.210	5,3	.334	8,5	M3234GBH	M3235GBH	LTCG 3/4 NPT 8.5 MM Split	cRV <sub>us</sub>	1.040	26,4	2.00	50,8	.62	15,7	.25	6,4	1.30	33,0	.72	18,3
.138	3,5	.610	15,5	M3234GBJ	M3235GBJ	LTCG 3/4 NPT Split Oval*	cRV <sub>us</sub>												
.250	6,4	.334	8,5	M8437GBH	M8438GBH	LTCG 1 NPT 8.5 MM Split	cRV <sub>us</sub>	1.326	33,7	2.41	61,2	.76	19,3	.30	7,6	1.73	43,9	1.01	25,7
				M4524GBH	M4525GBH	LTCG 1-1/4 NPT 8.5 MM Split	cRV <sub>us</sub>	1.680	42,7	2.69	68,3	.78	19,8	.30	7,6	2.05	52,1	1.27	32,3
<b>PG Hubs</b>																			
.210	5,3	.334	8,5	M3219GBH	M3220GBH	LTCG 16 8.5MM Split	cRV <sub>us</sub>	.886	22,5	1.68	42,7	.44	11,2	.25	6,4	1.06	27,0	.56	14,2
				M3222GBH	M3223GBH	LTCG 21 8.5MM Split	cRV <sub>us</sub>	1.115	28,3	1.89	48,0	.52	13,2	.25	6,4	1.30	33,0	.72	18,3
.250	6,4	.334	8,5	M3225GBH	M3226GBH	LTCG 29 8.5MM Split	cRV <sub>us</sub>	1.470	37,3	2.23	56,6	.57	14,5	.30	7,6	1.73	43,9	1.01	25,7
				M3204GBH	M3203GBH	LTCG 36 8.5MM Split	cRV <sub>us</sub>	1.875	47,6	2.39	60,7	.47	11,9	.31	7,9	2.05	52,7	1.27	32,3
<b>Metric Hubs</b>																			
.210	5,3	.334	8,5	M3198GBH	M3199GBH	LTCG LL M20 8.5MM Split	cRV <sub>us</sub>	.787	20,0	1.65	41,9	.41	10,4	.25	6,4	1.06	26,9	.56	14,2
				M4344GBH	M4345GBH	LTCG M25 8.5MM Split	cRV <sub>us</sub>	.985	25,0	1.89	48,0	.52	13,2	.25	6,4	1.30	33,0	.72	18,3
.250	6,4	.334	8,5	M4348GBH	M4349GBH	LTCG M32 8.5MM Split	cRV <sub>us</sub>	1.260	32,0	2.23	56,6	.58	14,7	.30	7,6	1.73	43,9	1.01	25,7
				M4352GBH	M4353GBH	LTCG M40 8.5MM Split	cRV <sub>us</sub>	1.575	40,0	2.39	60,7	.47	11,9	.31	7,9	2.05	52,7	1.27	32,3

Standard color black.  
 \*Oval shaped gland opening; not UL Recognized.

- Split Glands are designed for application to the cable **after the cable has passed through the LTCG**; e.g., RJ45 cable with Cat5e termination.
- Simply pass the cable termination through the LTCG body, apply Split Gland to the cable, and insert the gland/cable assembly into the LTCG fingers. Then tighten the Sealing Nut to achieve a **liquid tight seal**.
- For other cable/termination configuration sizes, and Pg and Metric hub threads, please consult Heyco.
- Integral Sealing Ring ensures a superior seal at the clearance or threaded mounting hole location, every time.

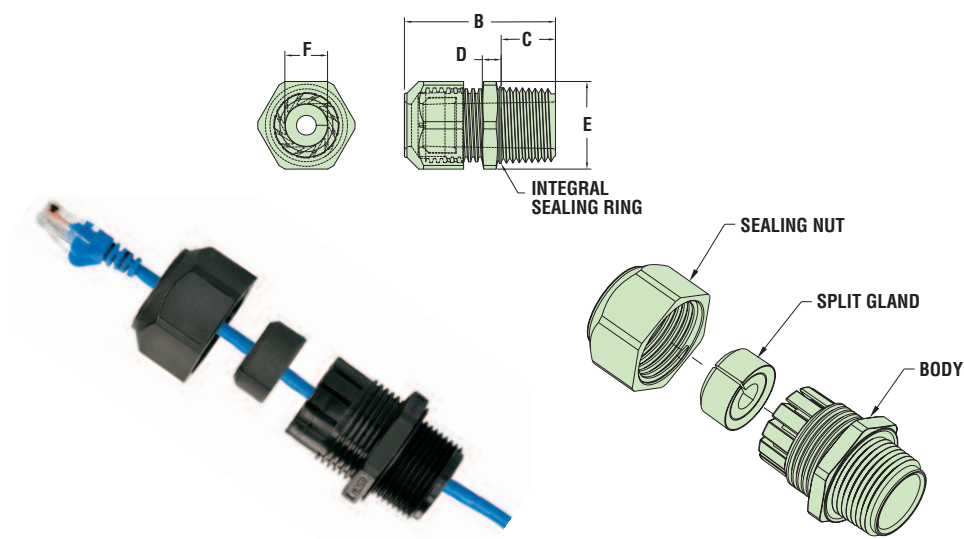

**Consult Heyco for PG and Metric Threaded Hubs**

Material	Nylon 6/6 w/TPE Sealing Gland
Certifications	cRV <sub>us</sub> Recognized under the Component Program of Underwriters' Laboratories File E51579 to both Canadian and U.S. Requirements
Flammability Rating	94V-2-Consult factory for V0 material
Temperature Range	Static -40°F (-40°C) to 239°F (115°C) Dynamic -4°F (-20°C) to 212°F (100°C)
IP Rating	IP 68 (70 PSI, 5 BAR)

*Quick Specs*