


Cable Stacker:

Conveyor cable routing, redefined.

MADE FOR REAL 

Ultra-organized cable runs – from the planning stage to completion.

- Isolate cables, relieve congestion and improve aesthetics.
- EZ Build engineering simplifies the build, tear-down and reassembly process.
- Eliminate waste, rework and installation time.

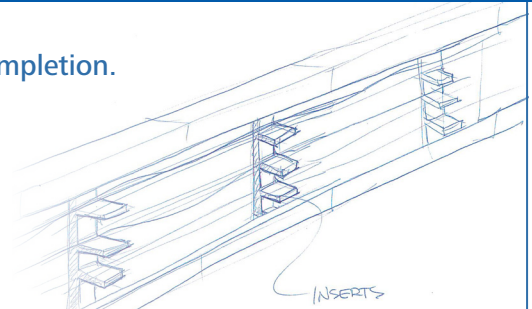

Cradle Pocket (x3)

Separate power and signal runs.

EZ Feed Cable Tie Slot (x3)

Insert cable tie if needed.

EZ Feed Cable Tie Groove (x3)

Cinch down bundle if needed.

EZ-in / EZ-out Retention Pin (x4)

- Retain wires during build out.
- Easy future access to add or remove wires.



Quick Mount Options

- Screw or rivet for surface mounting.
- M6 (#10) holes and slots for easy positioning and adjustability.

CutZone (x3)

Safely remove cable tie.

Bundling and Securing

Clips

Screw Mounting Bases

Cable Stacker

HellermannTyton's Cable Stacker is a cable management and mounting device used to organize wires and relieve congestion along wire pathways found in conveyor systems and automation equipment. These mounts offer individual cradle partitions that lead to faster installs, reduced rework and improved appearance and aesthetics. The EZ Build concept holds cables in place by the shape of the stacker unit and retention pins, separating cable types and eliminating the need for cable ties. Cable Stackers are secured to surfaces using two screws.

Features and Benefits

- Multiple cradle pockets separate power and signal runs.
- EZ-in / EZ-out retention pins retain wires during build out and allow future access to add or remove wires.
- EZ Feed cable tie groove for cinching down bundle if needed.
- CutZone creates guide for safely removing cable tie.
- Quick mount options using M6 (#10) screws in holes or slots for easy positioning and adjustability.



MATERIAL	Polyamide 6.6 high impact modified, heat and UV stabilized (PA66HIRHSUV)
Operating Temperature	-40°F to +230°F (-40°C to +110°C)
Color	Black (BK)



PART NO.	TYPE	Length (L) in. (mm)	Width (W) in. (mm)	Height (H) in. (mm)	Mounting Hole Dia. in. (mm)	Color	Pkg. Qty.
151-04218	CBLSTK3CZS	1.7 (43.0)	1.4 (36.0)	4.2 (106.9)	0.3 (6.6)	Black	10

Dimensions are approximate and subject to technical changes. Use Part No. for ordering and Type for specification purposes.

HellermannTyton North American Corporate Headquarters

7930 N. Faulkner Rd, PO Box 245017
Milwaukee, WI 53224-9517
Phone: (414) 355-1130, (800) 537-1512
Fax: (414) 355-7341, (800) 848-9866
email: corp@htamericas.com
www.hellermann.tyton.com

IATF 16949, AS9100, ISO 9001 and ISO14001 certified

HellermannTyton Canada

Unit #4, 205 Industrial Parkway North
Aurora, Ontario L4G 4C4 Canada
Phone: (800) 661-2461
Fax: (800) 390-3904
email: sales@hellermanntyton.ca

HellermannTyton Mexico

Anillo Periferico Sur 7980 Edificio 6A
Parque Industrial Tecnologico II
Santa Maria Tequepepan
Tlaquepaque, Jalisco, Mexico 45601
Phone: 011-52-33-3-133-9880
Fax: 011-52-33-3-133-9861
email: info-mx@hellermanntyton.com

ISO 9001 certified

Warranty Policy – HellermannTyton products are warranted to be free from defects in material and workmanship at the time sold by us; but our obligation under this warranty and that of the seller is limited to the replacement of the product, and neither we nor the seller are bound by any other warranty, expressed, implied or statutory. Under no circumstances are we or the seller liable for any loss, damage, expenses or consequential damages of any kind arising out of the use or inability to use these products. All are sold with the understanding that the user will test them in actual use and determine their adaptability for the intended uses.