



## HEYbrid™ Aluminum Liquid Tight Cordgrips

### Straight-Thru, NPT Hubs

Don't get SKU'ed: More Cable Range, Fewer SKU's!

*The Ultimate in Liquid Tight Strain Relief Protection*





CABLE DIA. RANGE				PART NO.	DESCRIPTION	UL or RA	PART DIMENSIONS									
Minimum		Maximum					Machined Aluminum	A Clearance Hole Dia. in. mm.	B Max. O.A. Length in. mm.	C Thread Length in. mm.	D Wrenching Nut Thickness		E Flat Size			
in.	mm.	in.	mm.									in.	mm.	in.	mm.	
<b>HEYCo-molded Finger/Gland</b>																
.065	1,7	.210	5,3	<b>M6100</b>	RALCG 1/4		.540	13,7	1.29	32,8	.40	13,2	.20	5,1	.75	19,1
.115	2,9	.250	6,4	<b>M6101</b>	ALCG 1/4	RA										
.065	1,7	.230	5,8	<b>M6102</b>	RALCG 3/8		.680	17,3	1.39	35,3	.41	10,4	.20	5,1	.88	22,4
.105	2,7	.315	8,0	<b>M6103</b>	ALCG 3/8	RA										
.095	2,4	.290	7,4	<b>M6106</b>	RALCG 1/2		.875	22,2	1.69	42,9	.53	13,5	.20	5,1	1.06	26,9
.170	4,3	.450	11,4	<b>M6107</b>	ALCG 1/2	UL										
.180	4,6	.400	10,1	<b>M6108</b>	RALCG LL 1/2		.875	22,2	1.81	46,0	.53	13,5	.20	5,1	1.25	31,8
.260	6,6	.545	13,8	<b>M6109</b>	ALCG LL 1/2	UL										
.250	6,4	.490	12,4	<b>M6110</b>	RALCG 3/4		1.109	28,2	1.93	49,0	.55	14,0	.20	5,1	1.31	33,3
.435	11,0	.705	17,9	<b>M6111</b>	ALCG 3/4	UL										
.490	12,4	.785	19,9	<b>M6112</b>	RALCG 1		1.375	34,9	2.29	58,1	.69	17,5	.20	5,1	1.75	44,5
.590	15,0	1.000	25,4	<b>M6113</b>	ALCG 1	UL										

Assembled O-ring **INCLUDED**.

Locknut not included - see page 3-13 for Metal Locknuts

- **HEYCo-molded gripping finger/gland technology** accommodates the **widest cable range** over the **fewest sku's**.
- Rolled grease-free threads **prevent galling** and allow for multiple assemblies and disassemblies. No messy, unsightly thread lubrication required.
- Approved for **NEMA 4, 4X, 6 and 6P**.
- Self-retaining sealing rings eliminate the need for an O-Ring groove, thus **reducing cost**.
- **Aluminum construction** provides excellent durability and performance for most **industrial applications**.
- For use in both indoor and outdoor applications to prevent cable pull-out, control arc of bend, and to provide a tight seal against environmental elements such as dirt, moisture, and coolants.
- Sealing washer required for through hole applications only.
- Unique design with a combination tightening surface that includes both a hex area and a knurled surface.
- Anti-friction washer allows for easier compression.
- DFARS Compliant

### The HEYCo-molded Finger, Gland & Seat

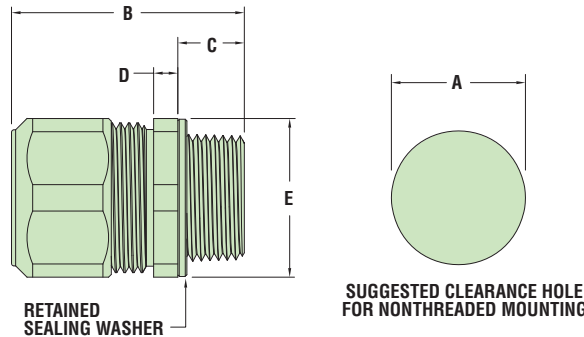

Material	6061 Aluminum Body and sealing nut with nylon 6/6 and TPE co-molded finger/gland assembly SBR Sealing Washer
Certifications	cULus Listed under Underwriters' Laboratories File E51579 cRAus Recognized under Underwriters' Laboratories File E51579
Flammability Rating	94V-2
Temperature Range	-40°F (-40°C) to 221°F (105°C)
IP Rating	IP68 (70 PSI, 5 BAR)

Quick Specs