


703-8650 DIL Spring loaded contact Solder mount $\text{Ø}.098$ (2,50) hole

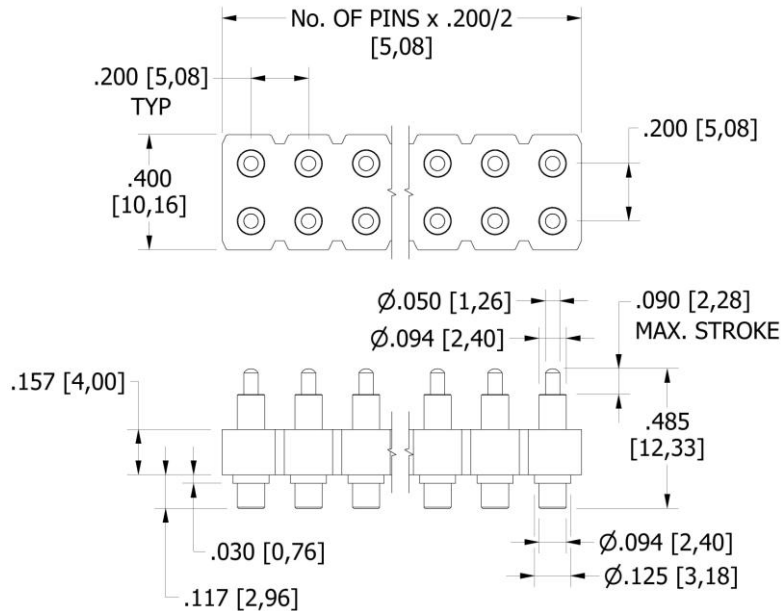

How to order code 703-8650-XX-03-10

No. of ways 04 thru' 20

Materials:-

Sleeve, Plunger, and Contact Body: Copper Alloy

Spring: Stainless Steel 302

Sleeve, Plunger, and Contact Body finish: .00002 (0.5um) Gold over Nickel

Spring finish: .00001 (0.25um) Gold over Nickel

Insulator: Nylon 46

Durability: 1,000,000 cycles

Rated Current (Free Air): 9A continuous @ 10° DT

Contact Resistance: 20m Ω Max.



RoHS Compliant